
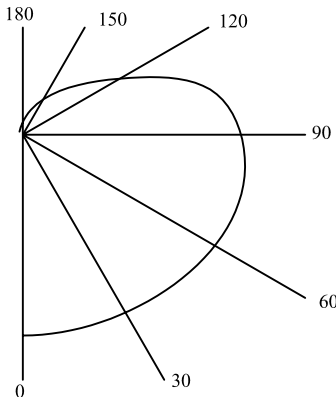


TI T12 / T8 / T5 STRIP

Linear Direct / Indirect

Surface & VP wet/damp location



RCR	C.U.
1	84
2	71
3	62
4	54
5	47
6	42
7	37
8	33
9	30
10	27

FIXTURE TYPE	VOLTS
JOB INFORMATION	

Ordering Information

TI

Mounting

Nominal Size

Lamp Quantity

Lamp Output

Voltage

Ballast

Options

S=Standard
D=Side
U=Up/Down
G=Stagger

2 = 24"
3 = 36"
4 = 48"
5 = 60"
6 = 72"
8 = 96"


1
2
3
4
6
8

14W 39W
17W 40W
21W 54W
24W 59W
25W 75W
28W 80W
32W 86W
35W 110W

120V
220V
347V


IS = Instant Start
RS = Rapid Start
PS = Programmed Start
E = Electronic
M = Magnetic

AR = Asymmetrical Reflector
EO = Electrical Outlet
LP = Low Profile
PC = Polycarbonate Lens (VP)
SR = Symmetrical Reflector
PVP = Premium Vapor Housing
VP = Vapor Housing
WG = Wire Guard
Consult factory for other options

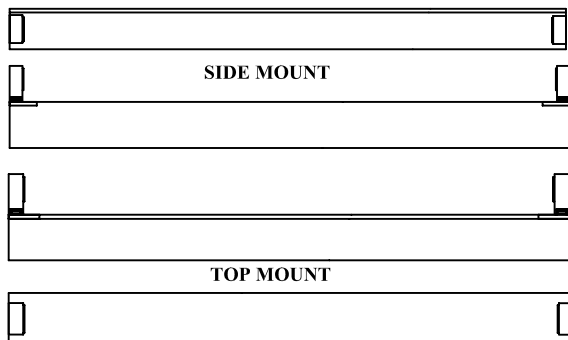







	T12 / T8			T8 Low Profile			T5		
	A	B	C	A	B	C	A	B	C
1 Light	2.75"	1.90"	3.30"	1.75"	1.25"	2.40"	1.56"	1.25"	2.10"
2 Light	4.25"	1.90"	3.30"	3.25"	1.25"	2.40"	2.50"	1.25"	2.10"
3 Light	9.25"	1.90"	3.30"	5.25"	1.25"	2.40"	3.75"	1.25"	2.10"
4 Light	9.25"	1.90"	3.30"	6.25"	1.25"	2.40"	5.00"	1.25"	2.10"
HO	3.80"	5.30"							

Custom width & height available



STAGGER

T8	1 Light	4' = 48"	3' = 36"	2' = 24"
	2 Light	4' = 52"	3' = 40"	2' = 28"
T5	1 Light	4' = 46"	3' = 34"	2' = 22"
	2 Light	4' = 50"	3' = 38"	2' = 26"

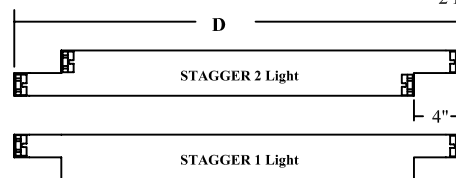

SR = Symmetrical Reflector

SPECIFICATIONS

Materials: Chassis - 22 ga. cold rolled steel

Finish: Chassis Exterior - Pre-painted white

Electrical: All wiring is non hygroscopic. Thermally protected class "P" ballast C.B.M. approved. Non PCB. If K.O. is within 3" of ballast, use wire suitable for at least 90 degrees.

Labels: cUL Listed

rev11/06