


TL4 T5 High Bay

Linear Direct

Pendant




Premium Direct linear lighting.
 Pendant mounted with up to 75° rotation
 Large area light distribution intended for retail,
 showroom, product highlighting.
 Can be modified to suit damp locations

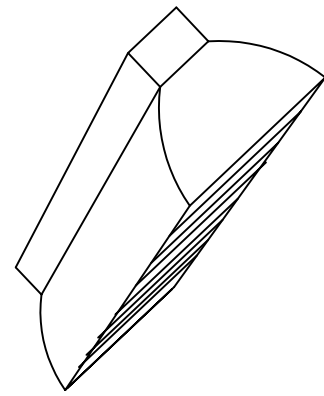

FIXTURE TYPE	VOLTS
JOB INFORMATION	

Ordering Information

TL4	<input type="text"/>	<input type="text"/>	<input type="text"/>	<input type="text"/>	<input type="text"/>	<input type="text"/>	<input type="text"/>
	Nominal Size	Lamp Quantity	Lamp Output	Voltage	Ballast	Pendant Stem	Options
	2 = 24"	2	14W 17W	120V	IS = Instant Start	18"	AL = Acrylic Lens
	3 = 36"	3	21W 24W	220V	RS = Rapid Start	24"	BFW = 1" Baffle (white)
	4 = 46"	4	25W 28W	347V	PS = Programmed Start	36"	BFS = 1" Baffle (silver)
	6 = 72"	6	32W 39W			48"	PL = Polycarbonate Lens
	8 = 92"		54W			60"	WG = Wire Guard
						72"	Consult factory for other options

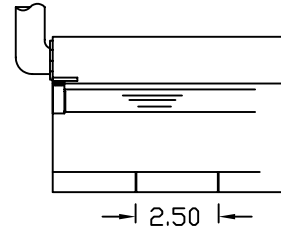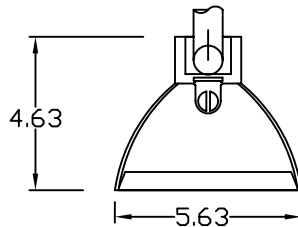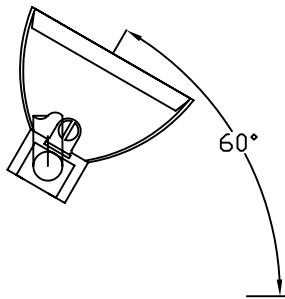

SPECIFICATIONS

Materials: Chassis - 22 ga. cold rolled steel

Reflector - Miro 4 specular aluminum

Finish: Chassis Exterior - Hi-Gloss Powder coated white. Custom colors available.

Electrical: All wiring is non hygroscopic. Thermally protected class "P" ballast C.B.M. approved. Non PCB. If K.O. is within 3" of ballast, use wire suitable for at least 90 degrees.

Labels: cUL Listed