



TL7 T5 / T8 High Bay

Direct

Surface / Pendant

Economy Industrial linear lighting. Surface mounted or suspended. Medium distribution
 Large area light distribution indented for retail, warehouse, manufacturing and commercial use.
 Can be modified to suit damp locations

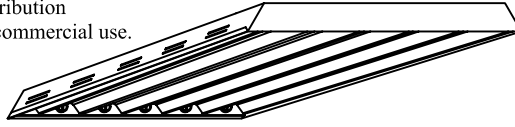

coefficients of utilization — zonal cavity method

RC	0.9			0.7			0.5		
RW	0.7	0.5	0.3	0.7	0.5	0.3	0.5	0.3	0.1
0	113	113	113	108	108	108	103	103	103
1	104	99	95	99	95	92	91	88	86
2	95	87	81	90	84	76	80	76	72
3	87	77	69	83	74	68	72	66	61
4	80	69	61	76	66	59	64	58	53
5	74	62	54	70	60	53	58	51	46
6	69	56	48	65	55	47	53	46	41
7	64	51	43	61	50	42	48	42	37
8	60	47	39	57	46	39	45	38	33
9	56	43	36	54	42	35	41	35	30
10	53	40	33	50	39	33	38	32	28

FIXTURE TYPE	VOLTS
JOB INFORMATION	

Ordering Information

TL7



Nominal Size

- 8 = 8 x 48 2LT
- 11 = 12 x 48 3LT
- 14 = 14 x 48 4LT
- 21 = 21 x 48 6LT
- 22 = 21 x 22 6LT (2' LAMP)
- 28 = 28 x 48 8LT
- TANDEM
- (lamps in cross section)
- 8T = 8 X 96 2LT
- 11T = 12 x 96 3LT
- 14T = 14 x 96 4LT
- 21T = 21 x 96 6LT
- 28T = 28 x 48 8LT



Lamp Output

- 14W 28W
- 17W 32W
- 21W 35W
- 24W 39W
- 25W 54W



Voltage

- 120
- 220
- 277
- 347



Ballast

- IS = Instant Start
- RS = Rapid Start
- PS = Programmed Start



Reflector


- S = Miro IV
- W = Hi-Gloss White



Options

- CX = Cord (x = length)
- LP = Lamps Installed
- OS = Occupancy Sensor
- PG = Plug
- PL = 1/16" Polycarbonate Lens
- WG = 12 GA Wire Guard
- SM = Stem Mount
- Consult factory for other options

4 Light T5

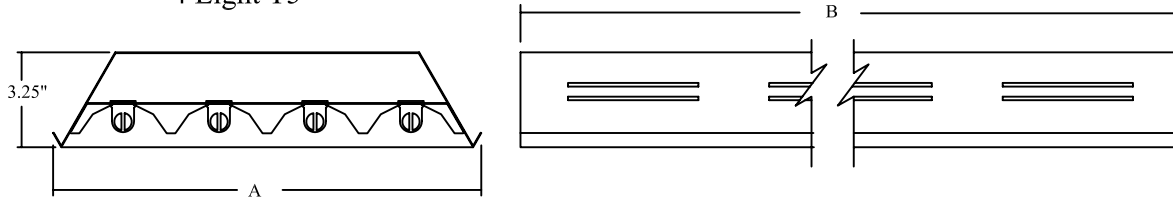

Model	Nominal Dimensions						Tandem				
	8	11	14	21	22	28	8T	11T	14T	21T	28T
A	8.1"	11.5"	14.8"	21.5"	21.5"	28.1"	8.1"	11.5"	14.8"	21.5"	28.1"
B	48"	48"	48"	48"	24"	48"	96"	96"	96"	96"	96"
Lamp Qty	2	3	4	6	6	8	4	6	8	12	16

Dimensions subject to change without notice
 Custom Sizes Available

SPECIFICATIONS

Materials: Chassis - 22 ga. cold rolled steel
 Reflector - Hi-Gloss White or Miro IV specular aluminum
 Finish: Chassis Exterior - Hi-Gloss Powder coated white
 Electrical: All wiring is non hygroscopic. Thermally protected class "P" ballast C.B.M. approved. Non PCB. If K.O. is within 3" of ballast, use wire suitable for at least 90 degrees.
 Labels: cUL Listed

PHOTOMETRIC REPORT S0804231-R1
 LAMP Cat#: FP24/841/HO/ECO
 LAMP: SIX (6) 24WATT T5 HIGH OUTPUT LINEAR FLUORESCENT RATED 1760 LUMENS IN 25 DEG. C. AMBIENT
 LAMP OUTPUT: 6 LAMP(S), RATED LUMENS / LAMP: 1760
 TOTAL LAMP LUMENS: 10,560
 BALLAST: OSRAM / SYLVANIA (3) QTP2X24T5/UNV PSN @ 120V
 INPUT WATTAGE: 166
 EFFICIENCY: 92.62%
 CIE CLASS: DIRECT
 SPACING CRITERION: @ 0 DEG. = 1.2276 @ 90 DEG. = 0.9281