


# TL "C" CABINET

## Linear Direct




Surface

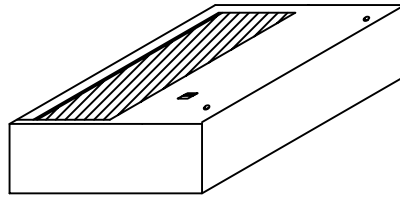

|                 |       |
|-----------------|-------|
| FIXTURE TYPE    | VOLTS |
|                 |       |
|                 |       |
| JOB INFORMATION |       |
|                 |       |
|                 |       |

### Ordering Information

|                             |                            |                          |                          |                          |                          |                           |                          |
|-----------------------------|----------------------------|--------------------------|--------------------------|--------------------------|--------------------------|---------------------------|--------------------------|
| <input type="checkbox"/> TL | <input type="checkbox"/> C | <input type="checkbox"/> | <input type="checkbox"/> | <input type="checkbox"/> | <input type="checkbox"/> | <input type="checkbox"/>  | <input type="checkbox"/> |
| Cabinet                     | Nominal Size               | Lamp Quantity            | Lamp Output              | Voltage                  | Ballast                  | Options                   |                          |
|                             | 2 = 24"                    | 1                        | 14W                      | 120V                     | IS = Instant Start       | CP = Cord & Plug (3ft)    |                          |
|                             | 3 = 36"                    | 2                        | 17W                      | 220V                     | RS = Rapid Start         | EO = Electrical Outlet    |                          |
|                             | 4 = 48"                    |                          | 21W                      | 347V                     | PS = Programmed Start    | SW = On/Off Rocker Switch |                          |
|                             |                            |                          | 25W                      |                          |                          |                           |                          |
|                             |                            |                          | 28W                      |                          |                          |                           |                          |
|                             |                            |                          | 32W                      |                          |                          |                           |                          |

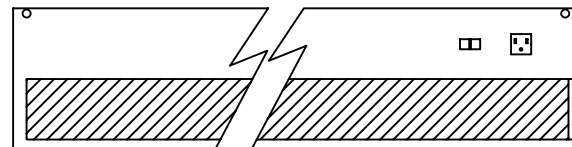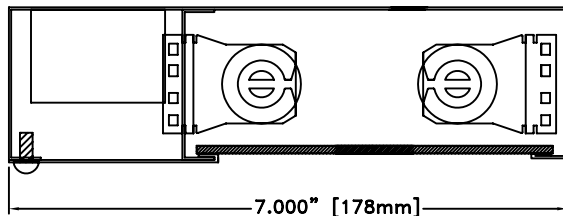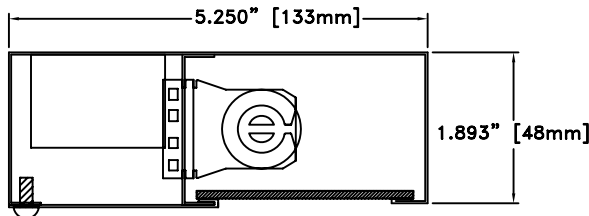

|    |         |         |
|----|---------|---------|
|    | 1 Light | 2 Light |
| 1' | 12 1/8" | 12 5/8" |
| 2' | 24 1/8" | 24 5/8" |
| 3' | 36 1/8" | 36 5/8" |
| 4' | 48 1/8" | 48 5/8" |

### SPECIFICATIONS

**Materials:** Chassis - .035" cold rolled steel  
Shielding - extruded clear acrylic

**Reflector:** Optional Aluminum high reflectance

**Finish:** Chassis Exterior - Baked powder paint. Colours on request.

**Electrical:** All wiring is non hygroscopic. Thermally protected class "P" ballast C.B.M. approved.  
Non

PCB. If K.O. is within 3" of ballast, use wire suitable for at least 90 degrees.

**Labels:** cUL Listed