


TMM BED / EXAM Light

Multi Function Recessed or Surface Mount Direct / Indirect Luminaires


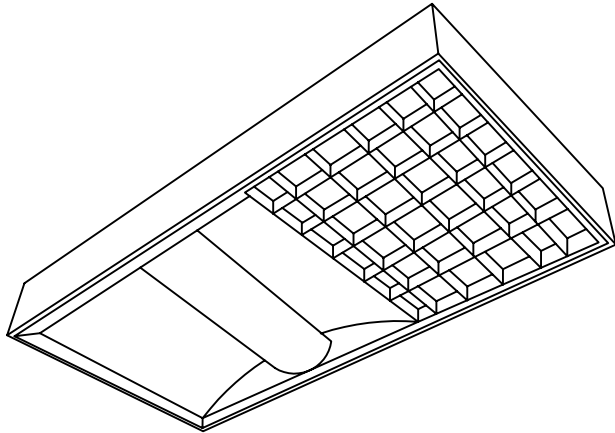


FIXTURE TYPE	VOLTS
JOB INFORMATION	

Ordering Information

TMM24	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
	Mounting	Lamp	Voltage	Shielding	Door Frame	Louver	Night Light	Options
	F = Surface G = Grid F = Flanged	40 = 40w Biax 50 = 50w Biax 55 = 55w Biax	120V 220V 347V	12 = .125" 18 = .187" 25 = .250"	18B = Brushed SS 18C = Painted CRS 18S = Painted SS	S = Semi Specular W = White	7 = 7w 9 = 9w L = LED	Consult Factory

(see specifications below)

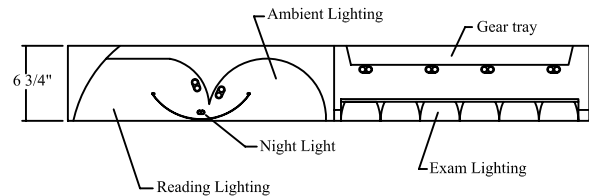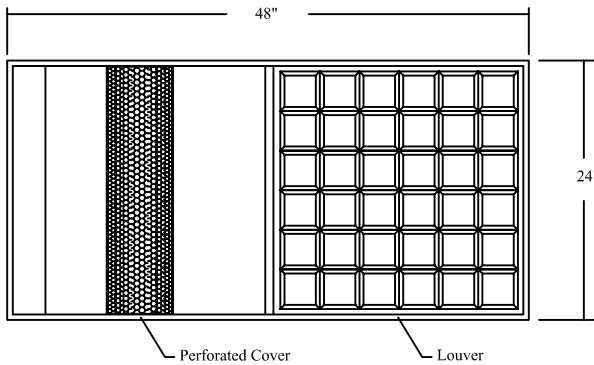

SPECIFICATIONS

Materials: Chassis - 20 Gauge Steel Body
 Shielding - Clear Polycarbonate
 Door Frame SS = Stainless Steel, CRS = Cold Rolled Steel

Reflector: Pre Coat Steel High Gloss

Finish: Chassis Exterior - Anodized or Baked powder paint. Colours on request.

Electrical: All wiring is non hygroscopic. Thermally protected class "P" ballast C.B.M. approved. Non PCB. If K.O. is within 3" of ballast, use wire suitable for at least 90 degrees.

Labels: cUL Listed