


TL CUBE2

Linear Direct

Pendant, Surface and Wall

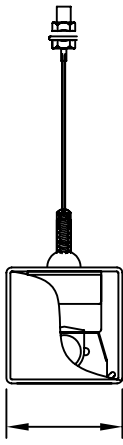



Compact and Slimlined Universal Direct, Up or DownLighter. Wall Mounted Both Horizontal and Vertical, Pendant and Surface.

2" (50)mm

2" (50)mm



FIXTURE TYPE	VOLTS
JOB INFORMATION	

Ordering Information

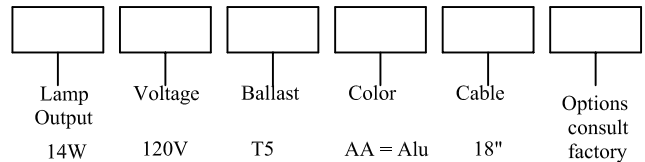

P = Pendant 2 = 24" WU = Wall Uplighter
 S = Surface 4 = 48" WD = Wall Downlighter
 W = Wall 5 = 60" SD = Surface Downlighter
 6 = 72" PU = Pendant Uplighter
 8 = 96" PD = Pendant Downlighter

Lamp Output: 14W, 24W, 28W, 35W, 54W, 80W
 Voltage: 120V, 220V, 347V
 Ballast: T5
 Color: AA = Alu, BK = Black, WH = White
 Cable: 18", 24", 36", 48"
 Options: consult factory

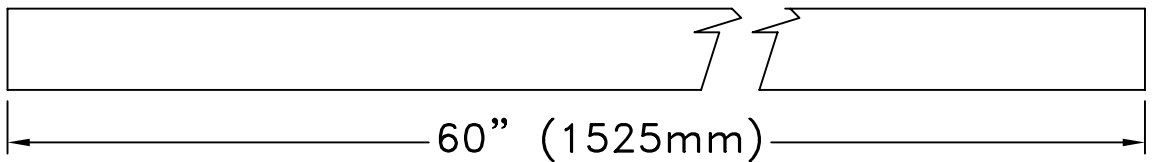

Cross section

Snap Fit Acylic Lense .090 Thk

Optional Wall Mount

SPECIFICATIONS

Materials: Chassis - .076" one piece fabricated steel

Reflector: Aluminum high reflectance

Finish: Chassis Exterior - Baked powder paint. Colors on request.

Electrical: All wiring is non hygroscopic. Thermally protected class "P" ballast C.B.M. approved. Non PCB. If K.O. is within 3" of ballast, use wire suitable for at least 90 degrees.

Labels: cUL Listed