
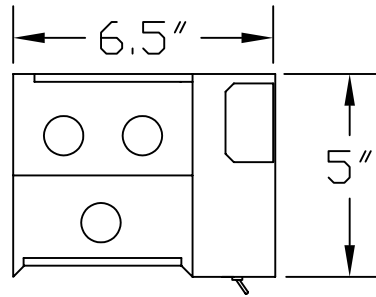
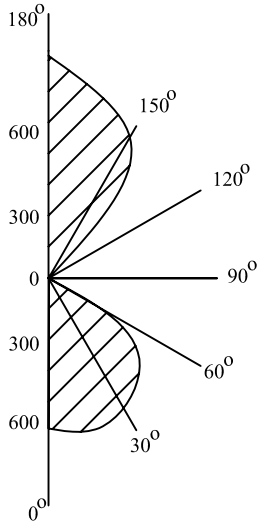


TM BED

Above Bed Wall Mounted Direct / Indirect Luminaires

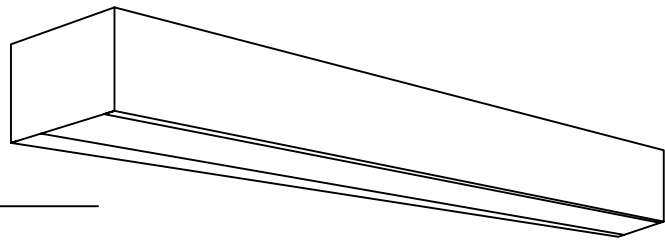

FIXTURE TYPE	VOLTS
JOB INFORMATION	

Ordering Information

TM	B								
Bed	Nominal Size	Lamp Configuration	Voltage	Ballast	Night Light	Watts	Switch	Options	
	3 = 36" 4 = 48"	1= 1up / 1 Down 2= 1 up / 2Down 3= 2 up / 1 Down 4 = 2up / 2 Down	120V 220V 347V	2=T8	U = Up D = Down	7 = 7 watt 9 = 9 watt 13 = 13 watt	2L = 2 Way left side 2R = 2 Way right side 4L = 4 Way left side 4R = 4 Way right side	L = Outlet Left side R = Outlet Right side S = Rocker Switch P = Pull Chain	

SPECIFICATIONS

Materials: Chassis - 20 Gauge Steel Body
Shielding - .100" Acrylic Pattern 12

Reflector: Pre Coat Steel High Gloss

Finish: Chassis Exterior - Anodized or Baked powder paint. Colours on request.

Electrical: All wiring is non hygroscopic. Thermally protected class "P" ballast C.B.M. approved. Non PCB. If K.O. is within 3" of ballast, use wire suitable for at least 90 degrees.

Switch: Toggle type

Labels: cUL Listed