


# TRA

## Custom Recessed Wall / Ceiling

Security / Dustproof / Jetproof

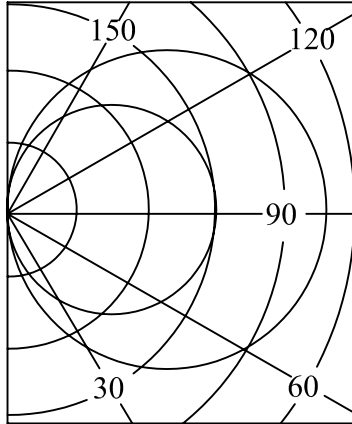

FIXTURE TYPE	VOLTS
JOB INFORMATION	

### Ordering Information

TRA



Diameter  
6"  
8"  
9"



Lens  
Fixture Side  
A12 = .125 Prismatic Acrylic  
A18 = .187 Prismatic Acrylic  
P12 = .125 Prismatic Polycarbonate  
P18 = .187 Prismatic Polycarbonate



Lens  
Environment Side  
CP12 = .125 Clear Polycarbonate  
CP18 = .187 Clear Polycarbonate  
CP25 = .250 Clear Polycarbonate  
CP35 = .375 Clear Polycarbonate



# of Lamps  
1  
2





Lamp  
Type  
13w  
18w  
26w  
A100



Voltage  
120  
347



Options  
consult  
factory

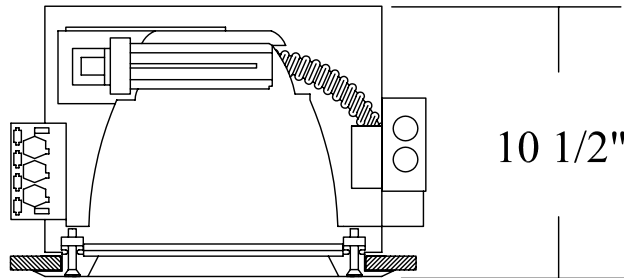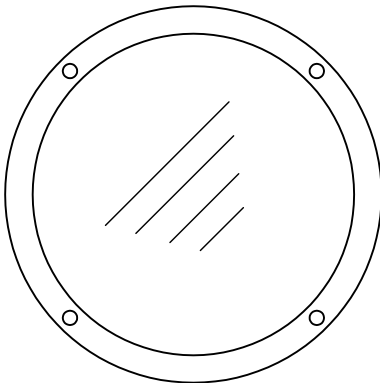

#### SPECIFICATIONS

**Materials:** Chassis - 18 ga cold rolled steel

**Reflector:** White high reflectance

**Finish:** Chassis Exterior - White baked powder paint. Other colors on request.

**Electrical:** All wiring is non hygroscopic. Thermally protected class "P" ballast C.B.M. approved. Non PCB. If K.O. is within 3" of ballast, use wire suitable for at least 90 degrees.

**Lens:** UV Stabilized and gasketed. Secured with tamper proof screws

**Labels:** cUL Listed