


TT "L" RECESSED MOUNT


Deep Cell Parabolic

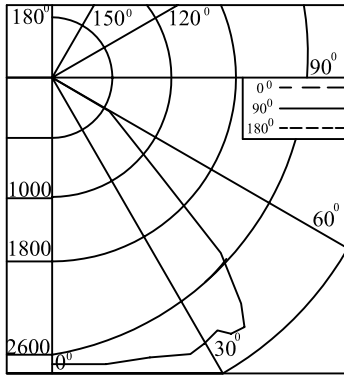

coefficients of utilization — zonal cavity method

	20	20	20
RF	20	20	20
RC	80	70	50
RW	70 50 30	50 30 10	50 30
room cavity ratio	1 57 54 51	52 50 47	49 47
	2 51 46 42	45 41 38	42 39
	3 46 40 35	39 35 31	37 33
	4 42 35 30	34 30 26	33 28
	5 38 31 26	30 25 22	29 24
	6 35 28 23	27 22 19	26 21
	7 33 25 20	24 19 16	23 19
	8 30 22 17	22 17 14	21 17
	9 28 20 15	20 15 12	19 15
	10 26 18 14	18 14 11	17 13


2 lamp 4' 120V energy saving T12

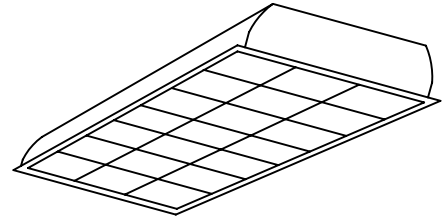

FIXTURE TYPE	VOLTS
JOB INFORMATION	

Ordering Information

TT	L								
Recessed Box	Nominal Size	Mounting	Louver Depth	Louver Cells	Lamp Quantity	Ballast	Voltage	Options consult factory	
	14 = 1x4 22 = 2x2 24 = 2x4	F = Flanged G = Grid	3 = 3" 4 = 4"	8 9 12 16 18 24	1 2 3 4 6	14W 17W 24W 28W 32W 32W "U" 54W	120V 277V 347V		

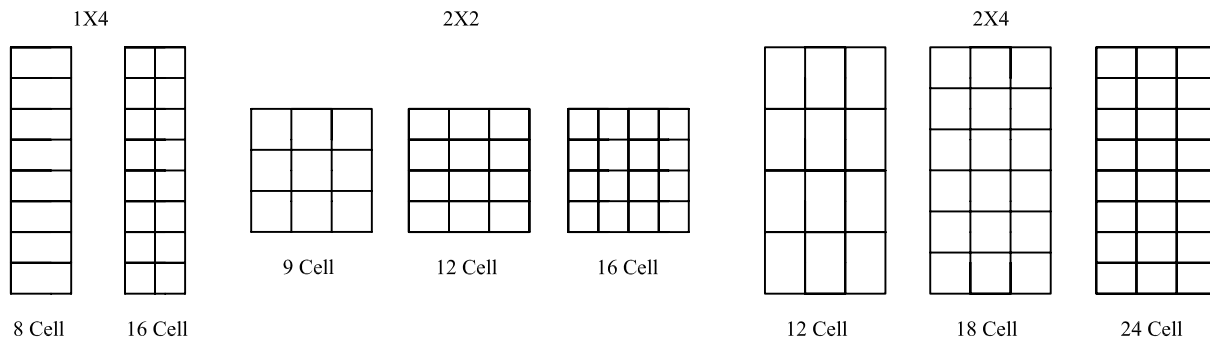

SPECIFICATIONS

Performance: Installation of a 2 lamp 40W luminaries in a room cavity ratio of 1, with reflectance of 80% ceiling, 50% wall and 20% floor, the C.U. shall not be less than .54

Materials: Chassis - 20 gauge cold rolled steel.
 Louver Finish - Low iridescence semi-specular.
 Unitized Housing - 20 gauge cold rolled steel supports all electrical components.
 Finish: Chassis Exterior - white baked enamel.

Electrical: Thermally protected class "P" ballast C.B.M. approved. Non PCB. If K.O. is within 3" of ballast, use wire suitable for at least 90 degrees.
 Labels: cUL Listed