

TT"MIST" Surface Direct



FIXTURE TYPE	VOLTS
JOB INFORMATION	

Ordering Information

TTM

Nominal Size
1 = 1x4
2 = 2x2

Lamp Quantity
1
2

Lamp Type
14
17
28
32
32U


Voltage
120V
277V
347V

Ballast

IS = Instant Start
PS = Program Start
RS = Rapid Start

X

Options consult factory

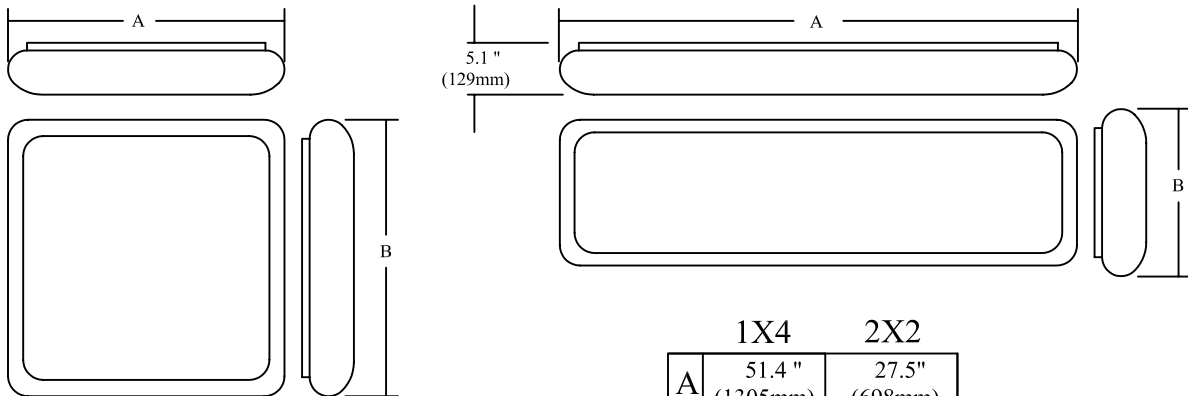

	1X4	2X2
A	51.4" (1305mm)	27.5" (698mm)
B	16.6" (422mm)	27.5" (698mm)

Nominal dimensions subject to change without notice

SPECIFICATIONS

Performance: Installation of a 2 lamp 32W luminaries in a room cavity ratio of 1, with reflectance of 80% ceiling, 50% wall and 20% floor, the C.U. shall not be less than .54

Materials: Chassis - 20 gauge cold rolled steel. Optional Stainless Steel 304
Mounting Pan - 22 gauge cold rolled steel.

Shielding: Opaque ultraviolet stabilized Acrylic

Finish: Chassis Exterior - white baked enamel.

Electrical: Thermally protected class "P" ballast C.B.M. approved. Non PCB. If K.O. is within 3" of ballast, use wire suitable for at least 90degrees.

Labels: cUL Listed